


Kanaline SR

Water suction and discharge hose for heavy-duty applications requiring combined vacuum and higher working pressures

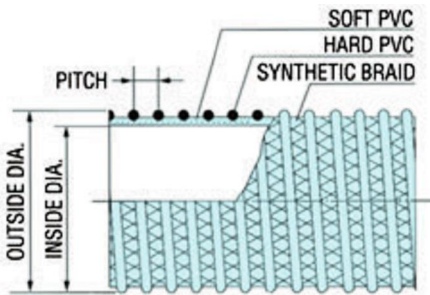

SPECIFICATIONS

Temp. Range: -13°F to 140°F

Applications: Heavy duty suction and discharge hose for use in fish suction and rental/construction pumping

Construction: Flexible PVC, rigid PVC helix, synthetic braiding, smooth bore, corrugated O.D.

Features: Lightweight and flexible. External helix provides for easy drag. Rated for both suction and discharge. Clear sidewall permits visual check of material flow.

Note: Not a food-grade hose. Banding coil must be used for 1-1/2", 2", 3", 4", 5" and 6" sizes.

AVAILABLE SIZES

Inside Dia. Inches	Outside Dia. Inches	Pitch Inches	Minimum Bend Radius 72°F, Inches	Working Pressure 72°F, P.S.I.	Vacuum Rating 72°F, In Hg	Weight Lbs/Ft	Standard Length Ft
1-1/2	2.1	0.37	2.5	110	28.0	0.47	60,100
2	2.6	0.43	4.0	100	28.0	0.70	60,100
3	3.7	0.59	6.3	100	28.0	1.13	60,100
4	4.8	0.65	7.1	75	28.0	1.74	60,100
5	6.1	0.87	9.2	70	28.0	2.90	60,100
6	7.2	0.93	10.2	70	28.0	3.88	60,100
8	9.5	1.07	15.7	60	28.0	5.54	15,20,25,40
10	11.63	1.22	24.8	40	28.0	8.68	15,20,25,40
12	13.8	1.34	45.0	28	25.0	10.30	20,40



* Over flexing or repeated flexing of hose within 18" of fitting is a common cause of hose failure. Installing a 12"-14" section of our Banding Coil at the end of the hose should be considered. **Kanaflex will not be responsible for damage to hose due to over flexing.**

Suction & Discharge
Cold Weather/Flexible
Heavy-Duty
Abrasion Resistance
Petroleum
Food Grade
Duct
Specialty
Accessories