


# KanaPower (ST120 LT)

**Tank truck drop hose with static grounding wire;  
50% lighter than conventional rubber hose**

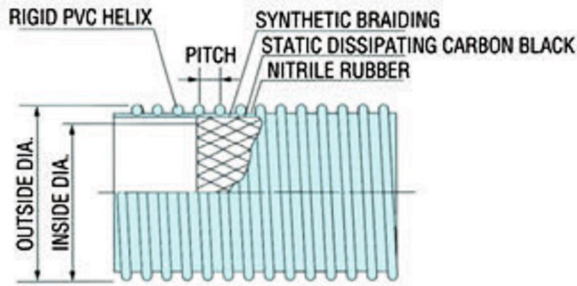

## SPECIFICATIONS

**Temp. Range:** -30°F to 140°F

**Applications:** Gasoline tank truck gravity drop hose for fluids such as naphtha, kerosene, light and heavy oil, diesel and some ethanol

**Construction:** Nitrile rubber static dissipating tube, rigid PVC helix, synthetic braiding, smooth bore, static grounding wire, corrugated O.D.

**Features:** Lightweight and flexible. External helix provides for easy drag. Rated for up to 40% aromatic content.

**Note:** Banding sleeves or banding coils must be used for all sizes.

Static wire must be properly imbedded during fitting installation and tested to assure proper static grounding of hose to a grounded system.

## AVAILABLE SIZES

Inside Dia. Inches	Outside Dia. Inches	Pitch Inches	Minimum Bend Radius 72°F, Inches	Working Pressure 72°F, P.S.I.	Vacuum Rating 72°F, In Hg	Weight Lbs/Ft	Standard Length Ft
2	2.68	0.39	5.0	65	29.8	1.13	60,100
3	3.8	0.59	6.0	65	29.8	1.37	60,100
4	4.9	0.65	8.0	65	29.8	2.16	60,100



\* Over flexing or repeated flexing of hose within 18" of fitting is a common cause of hose failure. Installing a 12"-14" section of our Banding Coil at the end of the hose should be considered. **Kanaflex will not be responsible for damage to hose due to over flexing.**